

EXPERTS FOR CUSTOMIZED FREQUENCY CONTROL PRODUCTS



Base Line OCXO

Ultra-Low Noise OCXO

TCXO Line

Vibration Insensitive Oscillators

Crystal Products for Space

GHz Crystal-Controlled Sources

PLL Oscillator Modules

Gated Crystal Oscillators

Frequency Distribution Units

Frequency Reference Units

Atomic Clocks

Masterclocks



AXTAL GmbH

Roemerring 9
D-74821 Mosbach, Germany

www.axtal.com
+49 (6261) 939 –

contact@axtal.com
fon: 834 fax: 836



Designed and
Manufactured
in Germany



About AXTAL

- ✗ **“AXTAL”** stands for **“Advanced XTAL Products”**, where **“XTAL”** is a common abbreviation of **“crystal”**.
- ✗ **AXTAL** was founded in 2003 by Bernd and Brigitte Neubig as privately-owned company. Since 2023 the AXTAL GmbH is an independent subsidiary of **Q-Tech Corporation**, a US-based leading supplier of high-reliability crystal oscillators. AXTAL is ISO 9001 certified since 2008. Company location is in Mosbach/Baden in Southern Germany.
- ✗ **AXTAL’s** core business comprises advanced Frequency Control Products (FCP), i.e. mainly customized crystal oscillators and frequency & timing modules.
- ✗ **AXTAL’s** main focus is on High-Reliability Oscillators and Frequency Control Modules with high requirements for environmental conditions, ultra-low noise performance, very high stability and frequency generation up into the GHz range for applications like microwave communication, test equipment, radar, military, aerospace and space.
- ✗ **AXTAL** incorporates the full value chain including R&D, design, manufacturing, screening and testing of our products from samples to production quantities completely in-house.



Product Range

OCXO – BASE LINE

OCXO – ULTRA-LOW NOISE LINE

TCXO – LINE

VIBRATION INSENSITIVE OSCILLATORS

CRYSTAL PRODUCTS FOR SPACE

CRYSTAL PRODUCTS FOR NEW SPACE

GHz CRYSTAL-CONTROLLED SOURCES

PLL OSCILLATOR MODULES

GATED CRYSTAL OSCILLATORS

FREQUENCY DISTRIBUTION UNITS

FREQUENCY REFERENCE UNITS

MASTERCLOCKS



AXTAL GmbH


Roemerring 9
D-74821 Mosbach, Germany

www.axtal.com
+49 (6261) 939 –

contact@axtal.com
fon: 834 fax: 836



Designed and
Manufactured
in Germany

Model	THD	-					
	SMD						-
Frequency range / Output		10 ~ 100 MHz	5 ~ 160 MHz – Sine wave/HCMOS				10 MHz
Stability		±5 ppb	±0.5 ~ ±500 ppb				±0.05 ~ ±0.4 ppb
Temperature range		-40°C ~ +85°C	-55°C ~ +105°C				-40°C ~ +80°C
Supply voltage		3.3 V	3.3 ~ 15 V				5 ~ 12 V
Features		Smallest OCXO Hermetically sealed	Base Line – Add your custom requirements like Phase Noise, G-Sensitivity, ADEV etc. and define your specific model via the option codes				Ultra-High Stability DOCXO
Size	THD	-	20 x 13 mm (CO 02)	20 x 20 mm (CO 41)	25 x 25 mm (CO 43)	36 x 27 mm	36 x 27 mm
	SMD	9 x 14 mm	22.7 x 15.1 mm	25 x 22 mm (CO 28)	27.8 x 27.8 mm	41 x 30 mm	-



Connectorized Models

Model						
	AXIOM90	AXIOM95	AXIOM95LP	AXIOM5050	AXIOM5050M	AXIOM5050ULN
Frequency range	10 ~ 40 MHz	5 ~ 160 MHz				
Stability	±0.5 ~ ±50 ppb	±10 ~ ±500 ppb				
Temperature range	-55°C ~ +95°C					
Supply voltage	3.3 ~ 15 V	5 ~ 15 V				
Feature	High Stability	High Stability	Low Profile	Low Noise	Multiple Outputs	Ultra-Low Noise
	All models available with Ultra-Low Noise Option and Low G-Sensitivity					
Size	54 x 40 x 19 mm SMA Feedthrough	54 x 40 x 19 mm SMA Feedthrough	54 x 40 x 13 mm SMA (Option) Feedthrough	50 x 50 x 21 mm SMA Feedthrough	50 x 50 x 21 mm SMA 2 ~ 6 Ports Feedthrough	50 x 50 x 21 mm SMA Feedthrough

More connectorized OCXOs with specialized features see also [Vibration-Isolated Oscillators](#) and [GHz Crystal-Controlled Oscillators](#)




AXTAL GmbH
Roemerring 9, D-74821 Mosbach, Germany

www.axtal.com
fon: +49 (6261) 939 834

contact@axtal.com
fax: +49 (6261) 939 836

 Designed and
Manufactured
in Germany

Model	THD						
	SMD						
Frequency range		10 MHz			50 ~ 160 MHz		
Phase noise [dBc/Hz] at 10 MHz or 100 MHz		-100 1 Hz -130 10 Hz < -155 Floor	-110 1 Hz -140 10 Hz < -165 Floor	-115 1 Hz -143 10 Hz < -170 Floor	-105 10 Hz -137 100 Hz < -170 Floor	-105 10 Hz -137 100 Hz < -175 Floor	-110 10 Hz -140 100 Hz < -180 Floor
Stability		±5 ppb			±25 ppb		±100 ppb
Temperature range		-55°C ~ +95°C					
Supply voltage		5 ~ 12 V	12 ~ 15 V				
Size	THD	20 x 20 mm (CO 41)	25 x 25 mm (CO 43)	36 x 27 mm (CO 08) 7-pin	20 x 20 mm (CO 41)	25 x 25 mm (CO 43)	50 x 50 x 21 mm SMA Feedthrough
	SMD	25 x 22 mm (CO 28)	27.8 x 27.8 mm	41 x 30 mm	25 x 22 mm (CO 28)	27.8 x 27.8 mm	




Phase Noise Characteristics

10 MHz


AXIOM75LN AXIOM175LN

- 110 dBc/Hz @ 1 Hz
- 140 dBc/Hz @ 10 Hz
- 160 dBc/Hz @ 100 Hz
- 170 dBc/Hz @ 1 kHz
- 173 dBc/Hz @ ≥10 kHz

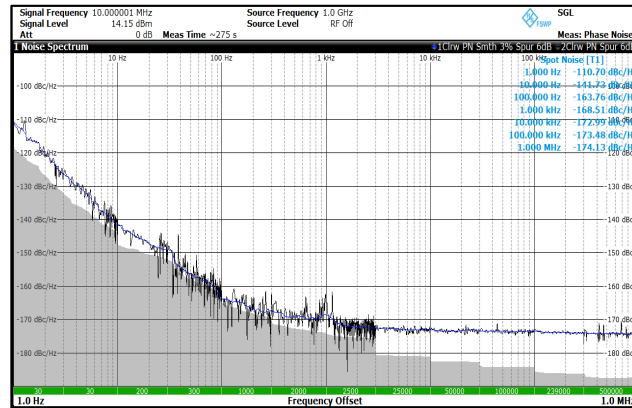

AXIOM45ULN-C AXIOM145ULN-C


- 115 dBc/Hz @ 1 Hz
- 143 dBc/Hz @ 10 Hz
- 160 dBc/Hz @ 100 Hz
- 167 dBc/Hz @ 1 kHz
- 170 dBc/Hz @ ≥10 kHz

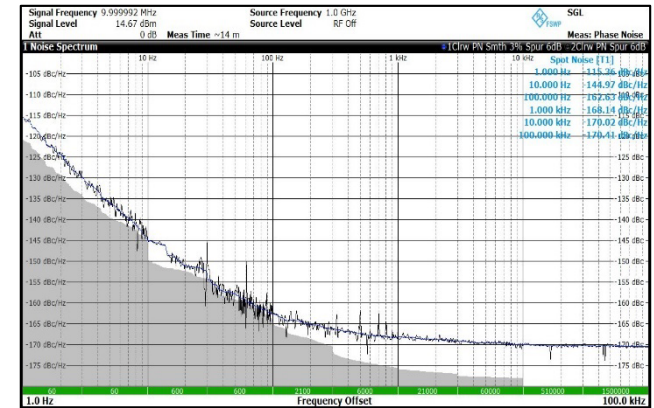

100 MHz

AXIOM75ULN-E AXIOM175ULN-E

- 108 dBc/Hz @ 10 Hz
- 138 dBc/Hz @ 100 Hz
- 165 dBc/Hz @ 1 kHz
- 175 dBc/Hz @ ≥10 kHz

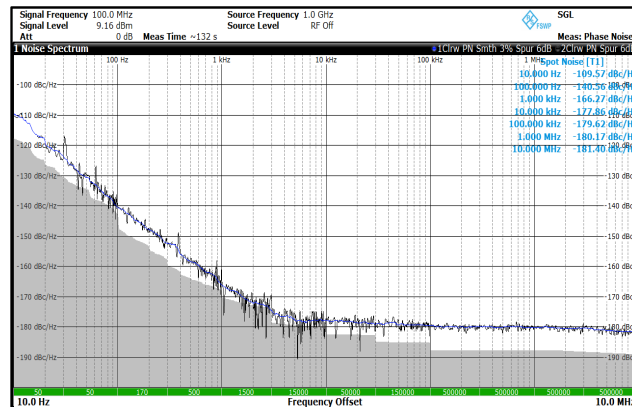


AXIOM15ULN AXIOM35ULN

- < -170 dBc/Hz @ ≥10 kHz

AXIOM5050ULN-E


- 80 dBc/Hz @ 1 Hz
- 110 dBc/Hz @ 10 Hz
- 140 dBc/Hz @ 100 Hz
- 167 dBc/Hz @ 1 kHz
- 180 dBc/Hz @ 10 kHz
- 183 dBc/Hz @ ≥100 kHz

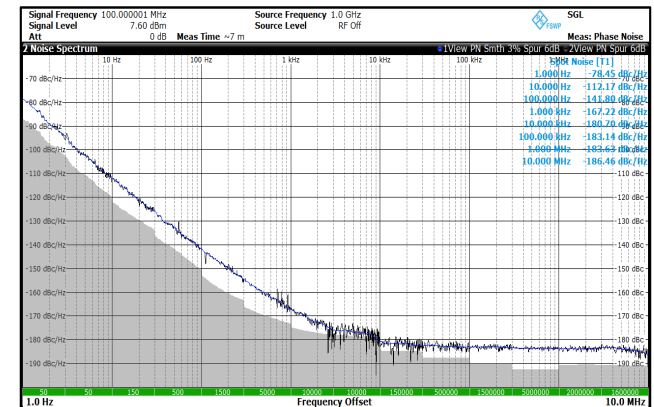

Models						
	Wide range of SMD & THD packages from 5x3.2 mm up to 20x20 mm					
Frequency range	10 ~ 50 MHz (small SMD packages) / 5 ~ 200 MHz (other packages)					
Output waveform	CSW / Sine wave / HCMOS / PECL / LVDS					
Stability	±0.05 ~ ±2 ppm					
Temperature range	-40°C ~ +85°C (standard range) / -55°C ~ +95°C (wide range) / -60°C ~ +125°C (ultra-wide range)					
Supply voltage	1.8 ~ 3.3 V (other voltages available on request)					
Special features	Very High Frequency Stability ±50 ppb	Very Wide Temperature Range -60°C ~ +125°C	Ultra-Low G-Sensitivity < 0.2 ppb/g	Ultra-Low Phase Noise Floor -180 dBc/Hz	Ultra-Low Phase Jitter 10 fs	New Space Application (Space COTS) 50 krad (TID)
Series	Various AXLE Series	AXLE WT Series AXLE LG Series	AXLE LG Series AXLE HF Series	AXLE HF Series	AXLE HF Series	AXLE S Series
Availability	Use of different TCXO-IC technologies and manufacturers allows good ability to deliver.					




Phase Noise HF-Series

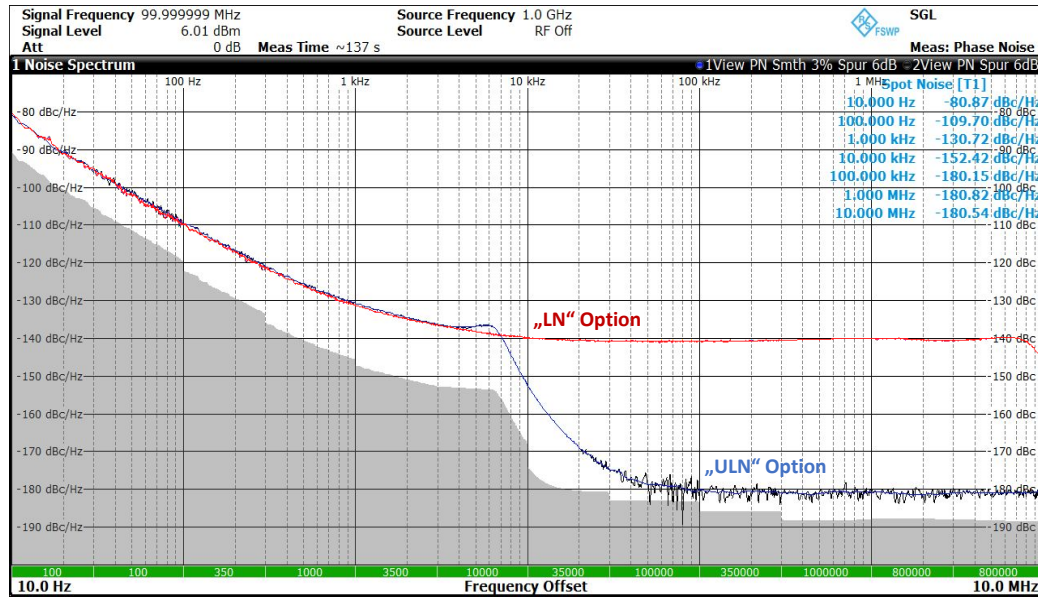

RMS phase jitter (12 kHz ~ 20 MHz): „ULN“ Option = 10 fs – „LN“ Option = 700 fs

G-Sensitivity

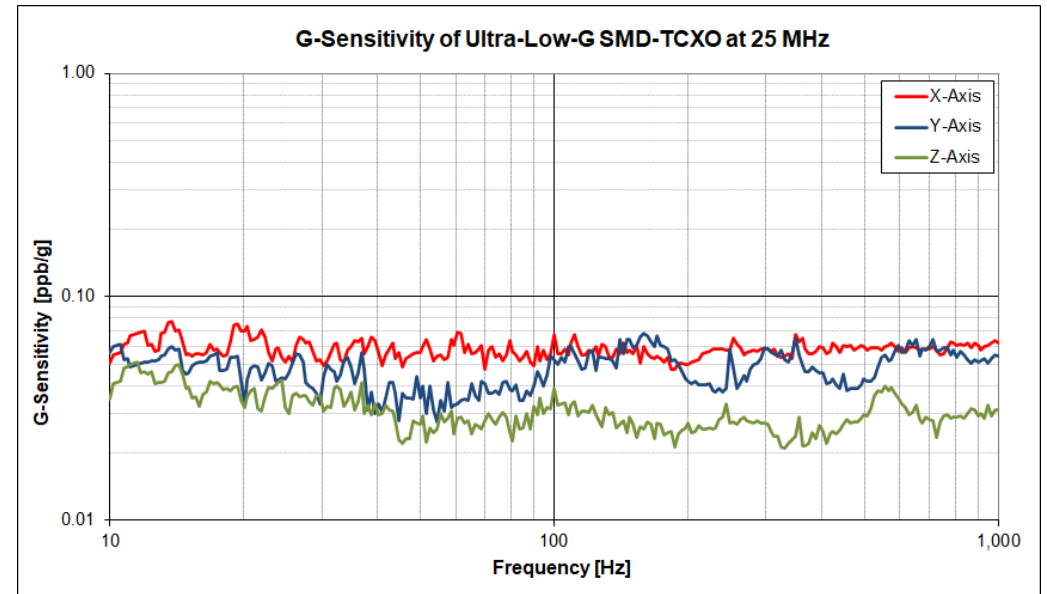

G-Sensitivity measured with flat random vibration profile of 0.1 g²/Hz

More High Frequency TCXOs see also [PLL Oscillator Modules](#) and [GHz Crystal-Controlled Oscillators](#)




Model							
		AXLE LG Series	AXIOM75LG	AXE238	AXIOM210	AXIOM220	AXIOM260
Oscillator type		Low G-Sensitivity TCXO	Low G-Sensitivity OCXO	Vibration-Isolated SPXO	Vibration-Isolated OCXO		
Features		High mechanical shock resistance	High mechanical shock resistance	Very high random vibration levels	Best Vibration Performance	Multiplied with Dual Output Option	Legacy model
G-Sensitivity [ppb/g] *		< 0.250	0.250	0.004	0.001	0.001	0.015
Frequency range		10 ~ 50 MHz	50 ~ 125 MHz	10 ~ 150 MHz	50 ~ 150 MHz	150 ~ 450 MHz	50 ~ 150 MHz
Phase noise [dBc/Hz]	Static	-115 100 Hz -160 Floor	-135 100 Hz -175 Floor	-135 100 Hz -170 Floor	-137 100 Hz -180 Floor	-130 100 Hz -170 Floor	-130 100 Hz -165 Floor
	Vibration **	-90 100 Hz -110 1 kHz	-95 100 Hz -115 1 kHz	-90 100 Hz -150 1 kHz	-115 100 Hz -155 1 kHz	-105 100 Hz -145 1 kHz	-90 100 Hz -140 1 kHz
	@	50 MHz	100 MHz	100 MHz	100 MHz	200 MHz	100 MHz
Stability		±500 ppb	±10 to ±300 ppb	±50 ppm	±10 to ±300 ppb		
Supply voltage		3.3 V	12~15 V				
Size		5x3.2 or 7x5 mm SMD	25 x 25 x 13 mm THD	38 x 38 x 19 mm SMA / Feedthrough	50 x 50 x 30 mm SMA / Feedthrough	70 x 70 x 40 mm SMA / Feedthrough	58 x 48 x 27 mm Feedthrough

* G-Sensitivity at 1 kHz offset ** Flat random vibration profile 0.01 g²/Hz, 10~2000 Hz




AXIOM75LG

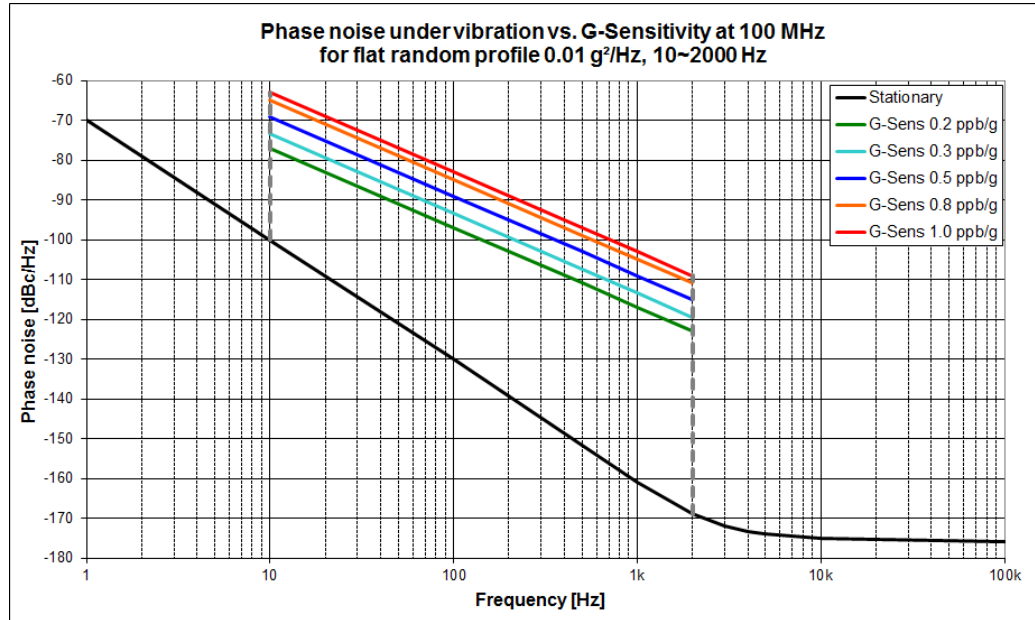

Phase noise under random vibration for flat profile PSD = $0.01 \text{ g}^2/\text{Hz}$, 10~2000 Hz

- Double PSD results in 3 dB worse phase noise
- Withstands very high vibration levels $>1 \text{ g}^2/\text{Hz}$
- High mechanical shock resistance

AXIOM210

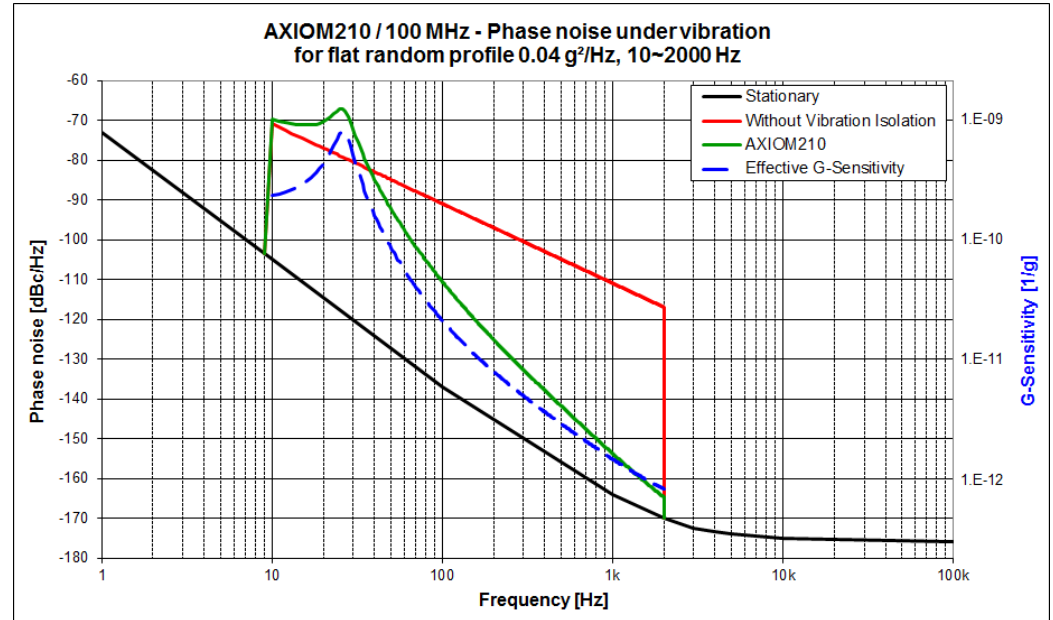

Phase noise under random vibration for flat profile PSD = $0.04 \text{ g}^2/\text{Hz}$, 10~2000 Hz

- Withstands very high vibration levels $>1 \text{ g}^2/\text{Hz}$ above 50 Hz
- Phase noise under vibration -155 dBc/Hz @ 1 kHz
- Isometric behaviour under vibration
- High mechanical shock resistance
- Internal vibration isolation – Insensitive to cabling



You name your vibration requirements – We compute the possible phase noise performance
Isolation absorber systems can be designed and tailored to your application requirements



Model		<i>Coming soon</i> 			
	AXIS45S	AXIOM5050S	AXIOM6060		MQF4021S
Product type	VCXO	OCXO	OCXO		Crystal Filter
Category	Classical Space (ECSS Class 1)				
Features	Wide pulling range & high linearity options	Ultra-Low Noise Ultra-High Stability (USO)	ESA EPPL Ultra-Low Noise		High filter slope and out-of-band attenuation
Radiation hardness	100 krad (TID) – SEE > 90 MeV·cm²/mg – SEL immune				
Frequency range	10 ~ 100 MHz	10 MHz	80 ~ 125 MHz		10 ~ 100 MHz
Output	Sine wave				50 Ohm
Stability	±10 ppm	±1 ppb	±50 ppb		±20 ppm
Temperature range	-30°C to +70°C	-30°C to +70°C			-40°C to +85°C
Supply voltage	5 V	12 V			-
Manufacturing	MIL-PRF-55310 Product Level “S” – ECSS-Q-ST-70-08C/38C				
Size	21 x 13 mm (CO 02)	50 x 50 x 30 mm SMA / FT	60 x 60 x 30 mm SMA / Micro-D	60 x 60 x 30 mm SMA / FT	40 x 21 mm SMD Package



Phase noise Performance

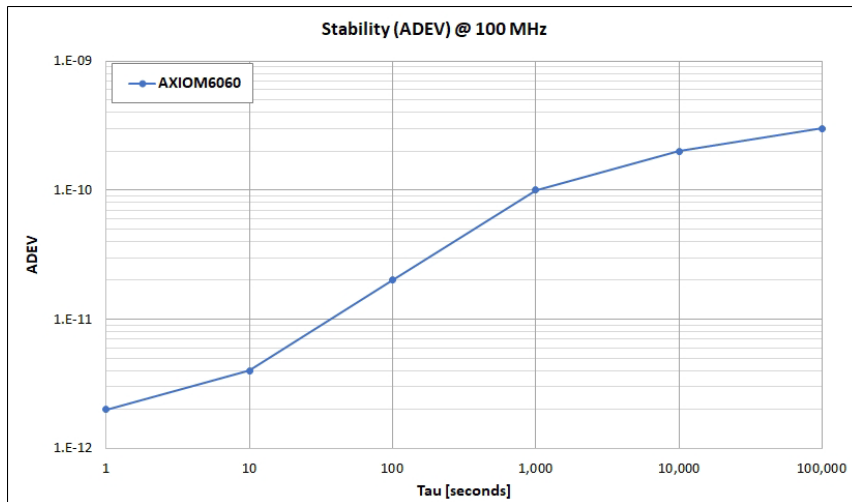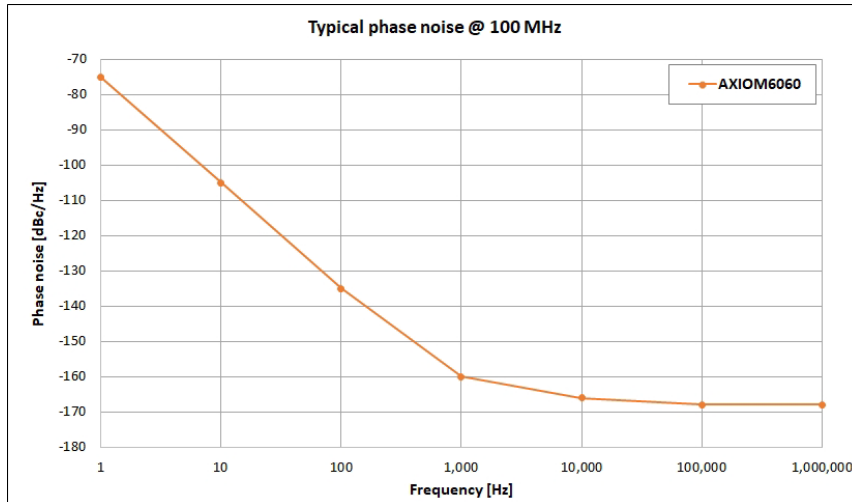



Design, Manufacturing and Quality

Space COTS “New Space Category”	Class 1 “Classical Space Category”
Specially selected commercial components & materials (COTS) / Suitable semiconductor technology for improved radiation hardness	Component selection based on ECSS-Q-ST-60C Class 1
Quartz crystal with High Q material (Low inclusion & etch channel density)	Material selection based on ECSS-Q-ST-70C / ECSS-Q-70-71
Manufacturing IAW ECSS-Q-ST-70-08C / ECSS-Q-ST-70-38C	
-	ESA certified personnel in Clean-Room environment (ISO Class 3)
Pre-cap inspection (Optional)	Pre-cap inspection of Crystal & Oscillator
-	Destructive Physical Analysis DPA (Optional)
Manufacturing IAW MIL-PRF-55310 Product Level “S” including	
Screening, Group-B	Screening, Group A-, B- and C-inspection
Full traceability of all critical components (Quartz, Semiconductors & PCB)	Complete traceability of all components, materials and manufacturing steps

Heritage



- **Geostationary (weather) satellites:** Feng Yun 2G China, DSO Singapore
- **International Space Station ISS:** ACES (Atomic Clock Ensemble in Space)
- **NCLE (NL-China Low Frequency Explorer) – Earth-Moon L2 Orbit**
- **LARA/ExoMars Mission (ESA):** Communication Link Earth-Mars
- **And others**



Model							
	AXLE5032S	AXLE7050S	AXIS45SH	AXIOM70SL	AXIOM75SL	AXIOM75SH	AXIOM3838S
Product type	TCXO		VCXO	OCXO			
Category	New Space (Space COTS) – Customizable to match mission requirements						
Features	LEO and New Space Applications - Ultra-Low Noise & High Stability Radiation tested (TID & SEE) – Different product levels available						
Radiation hardness	40 krad (TID) – SEL immune			10 krad (TID)	40 krad (TID) – SEL immune / SET insensitive		
Frequency range	10 ~ 50 MHz		40 ~ 100 MHz	10 MHz	10 MHz	80 ~ 125 MHz	10 MHz
Output	CSW		Sine wave	HCMOS	Sine wave		
Stability	±1 ppm		±5 ppm	±10 ppb	±10 ppb	±50 ppb	±10 ppb
Temperature range	-40°C to +85°C		-30°C to +70°C				
Supply voltage	3.3 V		3.3 ~ 5 V	5 V	8 ~ 12 V		
Manufacturing	MIL-PRF-55310 Product Level “S” or tailored to customer requirements						
Size	5 x 3.2 mm SMD Ceramic	7 x 5 mm SMD Ceramic	20 x 13 mm (CO 02)	25 x 25 mm (CO 43)	25 x 25 mm (CO 43)	25 x 25 mm (CO 43)	38 x 38 x 19 mm SMA / FT



Phase noise Performance

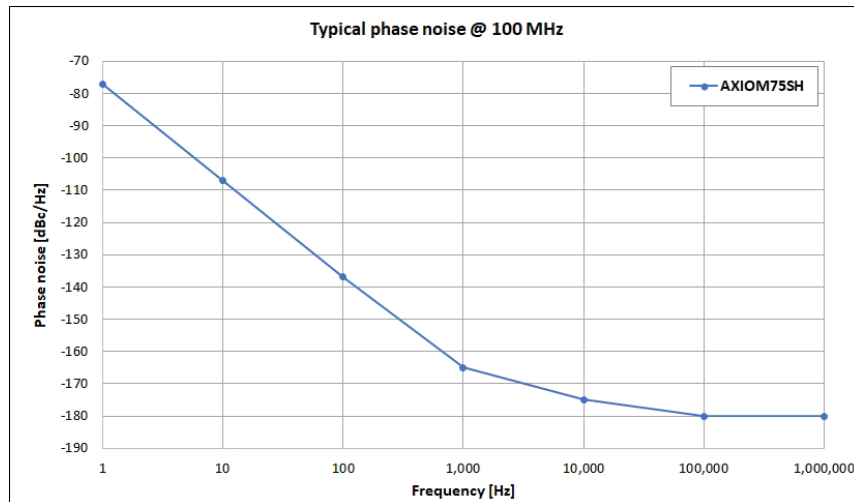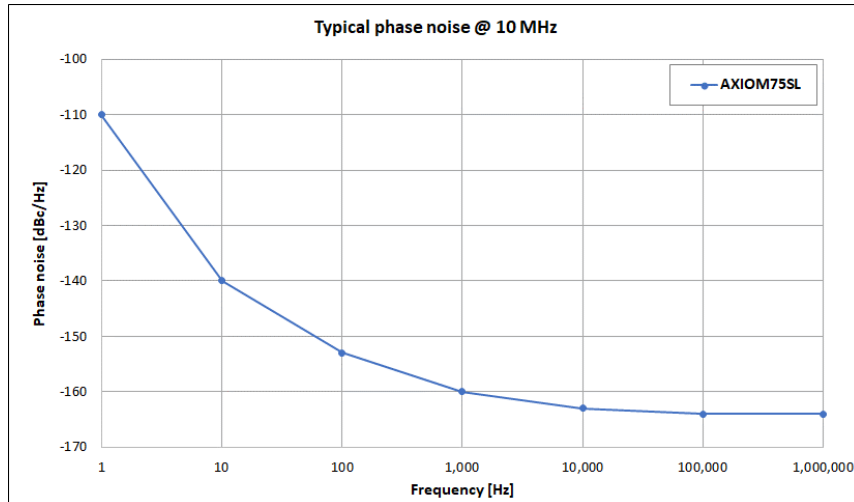



Design, Manufacturing and Quality

Space COTS “New Space Category”	Class 1 “Classical Space Category”
Specially selected commercial components & materials (COTS) / Suitable semiconductor technology for improved radiation hardness	Component selection based on ECSS-Q-ST-60C Class 1
Quartz crystal with High Q material (Low inclusion & etch channel density)	Material selection based on ECSS-Q-ST-70C / ECSS-Q-70-71
Manufacturing IAW ECSS-Q-ST-70-08C / ECSS-Q-ST-70-38C	
-	ESA certified personnel in Clean-Room environment (ISO Class 3)
Pre-cap inspection (Optional)	Pre-cap inspection of Crystal & Oscillator
-	Destructive Physical Analysis DPA (Optional)
Manufacturing IAW MIL-PRF-55310 Product Level “S” including	
Screening, Group-B	Screening, Group A-, B- and C-inspection
Full traceability of all critical components (Quartz, Semiconductors & PCB)	Complete traceability of all components, materials and manufacturing steps

Heritage

- **PLATiNO Satellite Platform:** 10 MHz Ultra-Low Noise OCXO
- **One Sat Satellite Platform:** 100 MHz Ultra-Low Noise OCXO
- **LEO & New Space Missions:** ESA, DSO Singapore, South-Korea etc.
- **Many other Cube and Small Satellite Missions**






Model	 AXPS10	 AXPS20	 AXGX75	 AXGX90	 AXE/AXIS/AXLE1000
Oscillator type	PSO (SAW)		SPXO		SPXO / VCXO / TCXO
Frequency generation	Fundamental		Frequency Multiplication		
Frequency range	950 ~ 1532 MHz				300 ~ 1300 MHz
Stability	±350 ppm		±30 ppm		±0.5 ~ ±30 ppm
Temperature range	-40°C ~ +85°C				
Supply voltage	5 V		12 V		
Feature	Gated versions for Air Traffic Control (IFF) available				Low Noise
Size	20 x 13 mm (CO 30) SMD	20 x 13 mm (CO 02) THD	25 x 25 mm (CO 43) THD	54 x 40 x 19 mm SMA Feedthrough	54 x 40 x 19 mm SMA Feedthrough

More GHz Sources with specialized features see also [Gated Crystal Oscillators](#) and [PLL Oscillator Modules](#)



High Stability GHz Sources

Model							
	AXLE130	AXLE175	AXLE2000	AXIOM450	AXIOM1000	AXIOM2000	AXIOM2700
Oscillator type	TCXO			OCXO			
Frequency generation	Internal PLL / Frequency Multiplication			Frequency Multiplication / Mixed			
Frequency range	500 ~ 2500 MHz	500 ~ 2500 MHz	1 ~ 8 GHz	160 ~ 500 MHz	300 ~ 1500 MHz	10 ~ 3200 MHz	10 ~ 7000 MHz
Stability	±0.5 ppm			±100 ppb			
Temperature range	-40°C ~ +85°C						
Supply voltage	5 V		12 V				
Feature	Low Noise Small size	Low noise Gated version & High output level available	SHF	Ultra-Low Noise Small size	Ultra-Low Noise	Ultra-Low Noise Multiple outputs Customizable	Ultra-Low Noise Multiple outputs Customizable
Size	20 x 20 x 8 mm 16 leads SMD	25 x 25 x 8 mm 32 leads SMD	50 x 50 x 21 mm SMA Feedthrough	36 x 27 mm (CO 08) THD	50 x 50 x 21 mm SMA Feedthrough	60 x 60 x 30 mm 3x SMA Feedthrough	70 x 70 x 30 mm 3x SMA Feedthrough

For other GHz Sources with specialized features see also [Gated Crystal Oscillators](#) and [PLL Oscillator Modules](#)






AXTAL GmbH
Roemerring 9, D-74821 Mosbach, Germany

www.axtal.com
fon: +49 (6261) 939 834

contact@axtal.com
fax: +49 (6261) 939 836

 Designed and
Manufactured
in Germany


Model								
		AXON20	AXON1000	AXON2500	AXPLT2500	AXPLO10/100	AXPLO2600	AXPLO2700
Internal oscillator type		VCXO	VCO		TCXO	OCXO		
Frequency	Output	50 ~ 160 MHz	300 ~ 3000 MHz	1 ~ 8 GHz	1 ~ 8 GHz	10 ~ 160 MHz	10 ~ 3000 MHz	10 ~ 7000 MHz
	Input	5 ~ 100 MHz						
Stability (Free-running)		±10 ppm	±10 MHz	±10 MHz	±1 ppm	±10 ppb	±100 ppb	±100 ppb
Temperature range		-20°C ~ +70°C				-10°C ~ +60°C		
Supply voltage		3.3~5 V	12~15 V					
Features		Low Noise Small Size	Internal TCXO reference available	SHF	SHF High Stability	Ultra-Low Noise PN Clean-up High stability	UHF Ultra-Low Noise High stability Programmable	UHF/SHF Ultra-Low Noise Multiple outputs Customizable
Size		20 x 13 mm (CO 29) SMD	54 x 40 x 19 mm SMA Feedthrough	50 x 50 x 21 mm SMA Feedthrough	50 x 50 x 21 mm SMA Feedthrough	54 x 40 x 19 mm SMA Feedthrough	60 x 60 x 30 mm 2x SMA Micro-D	70 x 70 x 30 mm 4x SMA Micro-D

You name your requirements – We find or design you a customized module




General Block Diagram & Performance Examples

General Block Diagram PLL Oscillator Modules

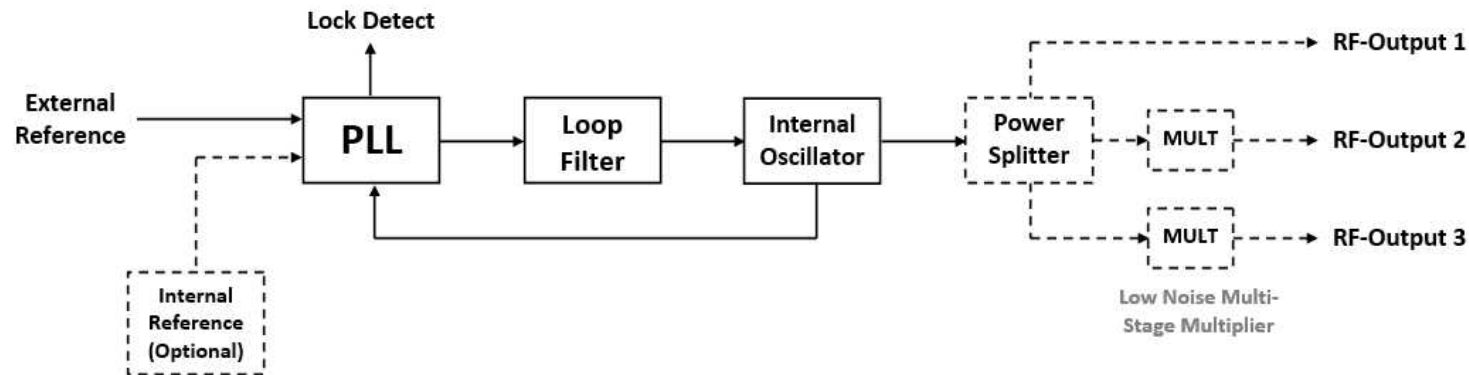


- PLL Phase Noise Performance can be tailored to your specific requirements
- Fully customizable modules available
- Phase coherence of all outputs guaranteed due phase-locking or frequency multiplication
- Programmable versions available


Performance Examples

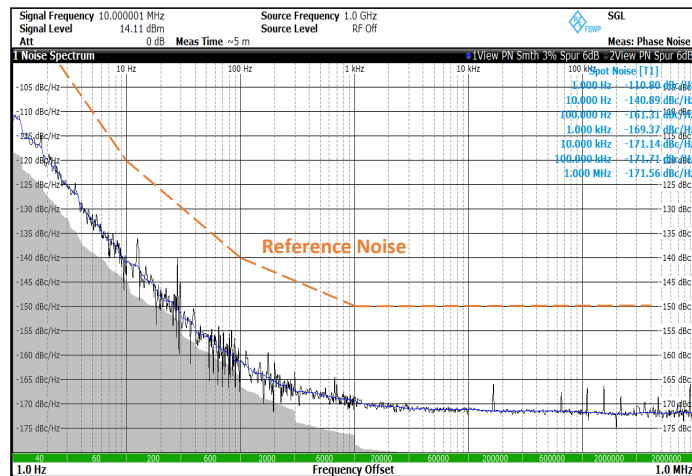

AXPLO10 – Clean-up (locked to 10 MHz)



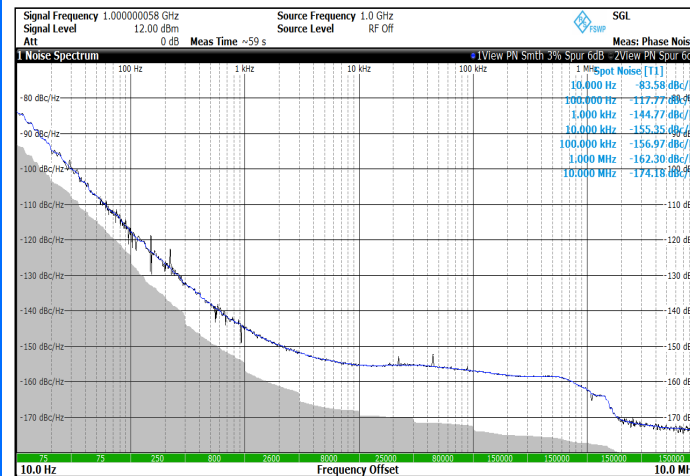


AXPLO2600 - 1000 MHz (x10) locked to 10 MHz

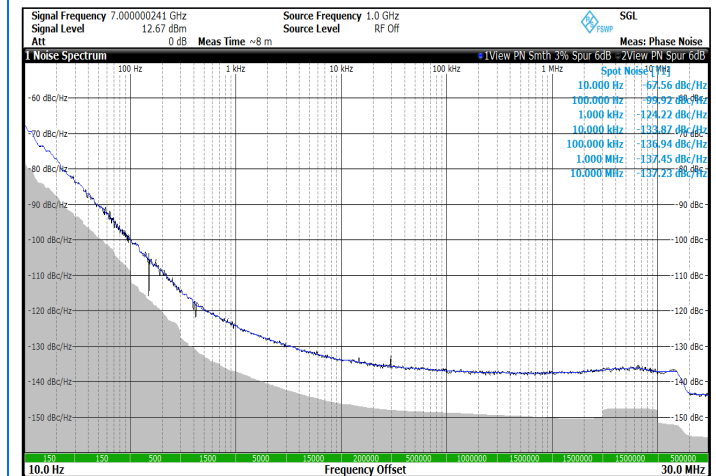

AXPLO2700 - 7000 MHz (x70) locked to 10 MHz





Model							
	AXGS10	AXGS20	AXGT175	AXGX75	AXGX90	AXG2X45G	AXGS4530G
Oscillator type	GSO (SAW)		GXO			Dual-GXO	GSO (SAW)
Frequency range	950 ~ 1532 MHz (Standard Frequencies 1030 MHz, 1090 MHz and 1532 MHz)						
Stability	±350 ppm		±1 ppm	±30 ppm			±200 ppm
Temperature range	-40°C ~ +85°C						-55°C ~ +100°C
Supply voltage	5 V				12 V		
Feature	Small size Low Profile		Compact size High stability	Compact size High stability	Connectorized High stability	Dual Switchable Frequency	MIL-PRF-55310 Multiple outputs
Size	20 x 13 mm (CO 30) SMD	20 x 13 mm (CO 02) THD	25 x 25 x 8 mm 32 leads SMD	25 x 25 mm (CO 43) THD	54 x 40 x 19 mm SMA Feedthrough	36 x 27 mm (CO 08) THD	45 x 30 x 5 mm DIL 30 leads NiAu finish




Block Diagram & Performance Examples


Block Diagram Gate Function (ASK)

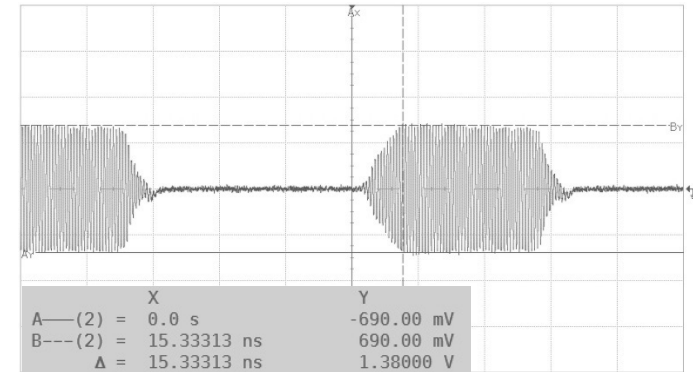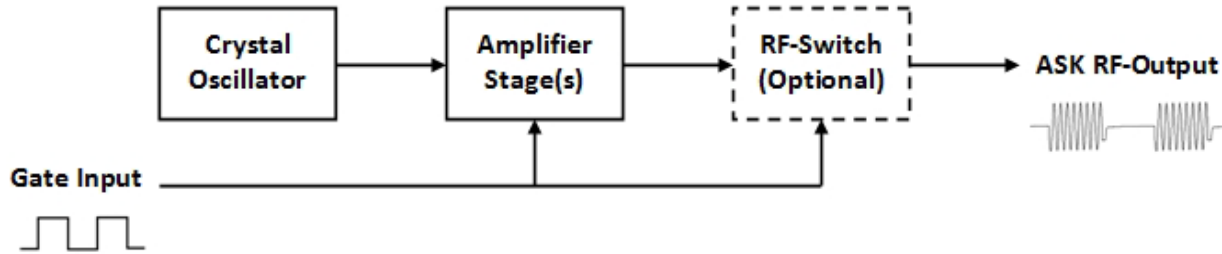

Performance Examples

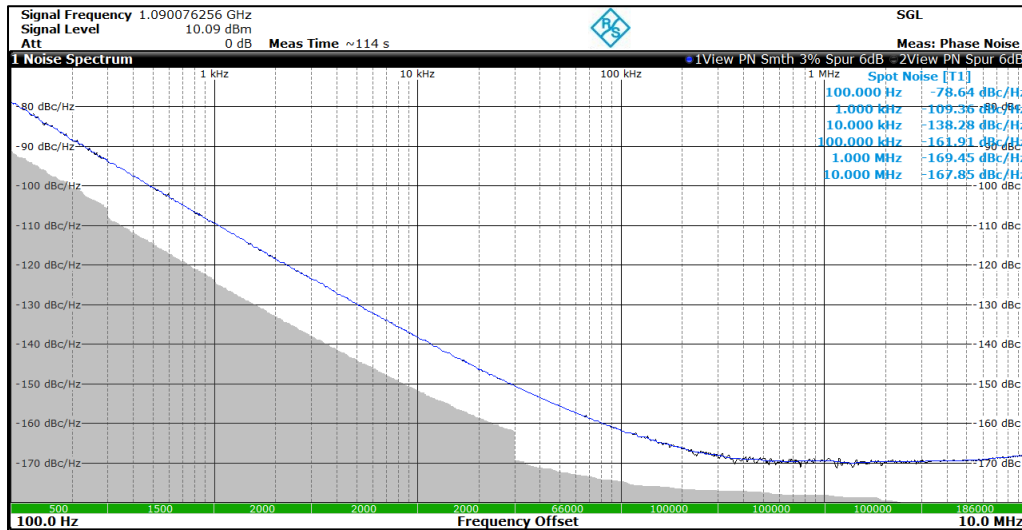

AXGS20 – 1090 MHz (SAW Oscillator)

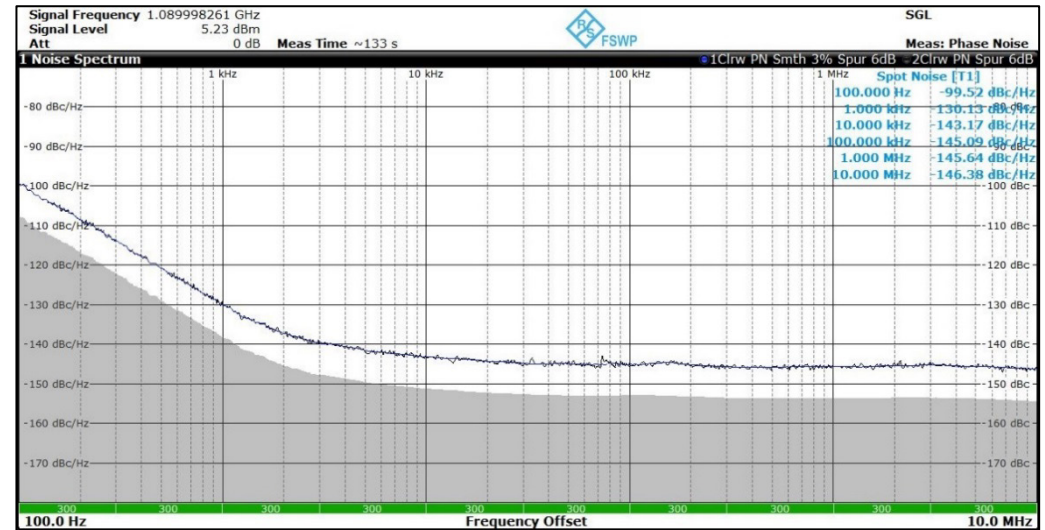

AXGX90 – 1090 MHz (Crystal Oscillator)






Model	AXDA9000	AXDA9100	AXDA9200-CU	AXTAL References
	Low Noise Selective Distribution Amplifier	1PPS Pulse Distribution Amplifier	Clean-up Module with 10 MHz & 1PPS Pulse Distribution Amplifier	Cascadable with AXDA Series
Frequency	5 ~ 100 MHz (Fixed)	1PPS	10 MHz / 1PPS	OCXO AXIOM9000 GPSDO AXGPS9000 Rubidium AXRB9000 Rubidium AXRB Series Cesium AXCS Series Combinable with Phase Noise Clean-up Modules AXPLO10 AXDA9200-CU
Features	▪ Ultra-Low Phase Noise ▪ Up to 16 outputs ▪ Very high isolation: reverse/inter-channel ▪ Standard frequencies: 5, 10 and 100 MHz	▪ High Speed ▪ Up to 16 outputs ▪ TTL/HCMOS level ▪ Low pulse delay with very low variation between ports	▪ Phase Noise Clean-up of 10 MHz ▪ Ultra-Low Phase Noise ▪ 1 to 4 distribution amplifiers for 10 MHz and 1PPS (optional)	
Operation	AC Supply 100 ~ 240 V (47 ~ 63 Hz) / Operating temperature range -10°C ~ +60°C			
Size	Slim 19" Rack - 1 HU			





Phase Noise Performance

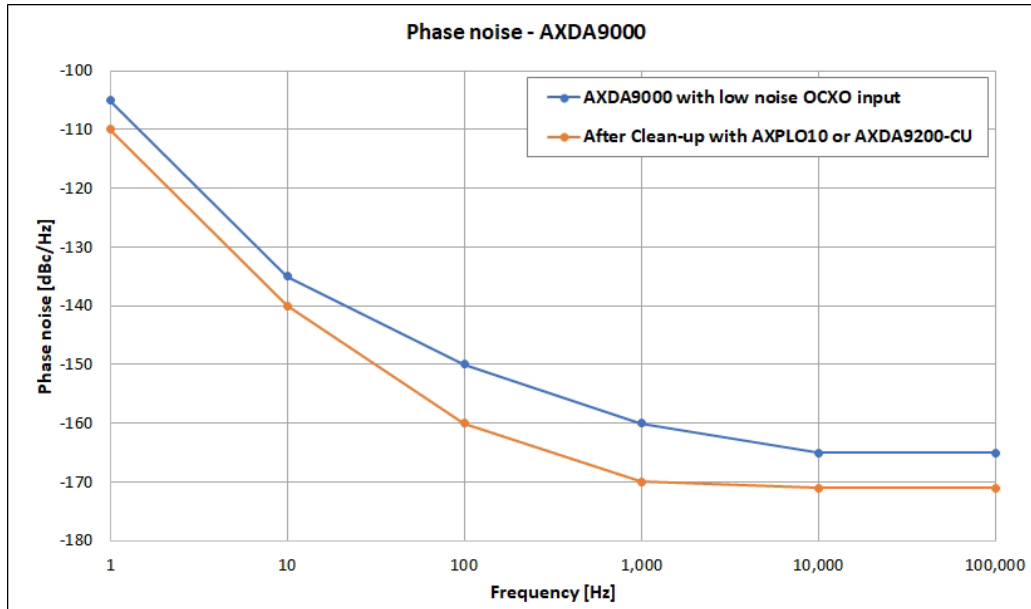

AXPLO10 / AXDA9200-CU Clean-up modules also suppress spurious due to external interferences and can be used at the input of the AXDA9000 or at the output of channels with high requirements for phase noise and spectral purity.

Frequency Distribution Block Diagram

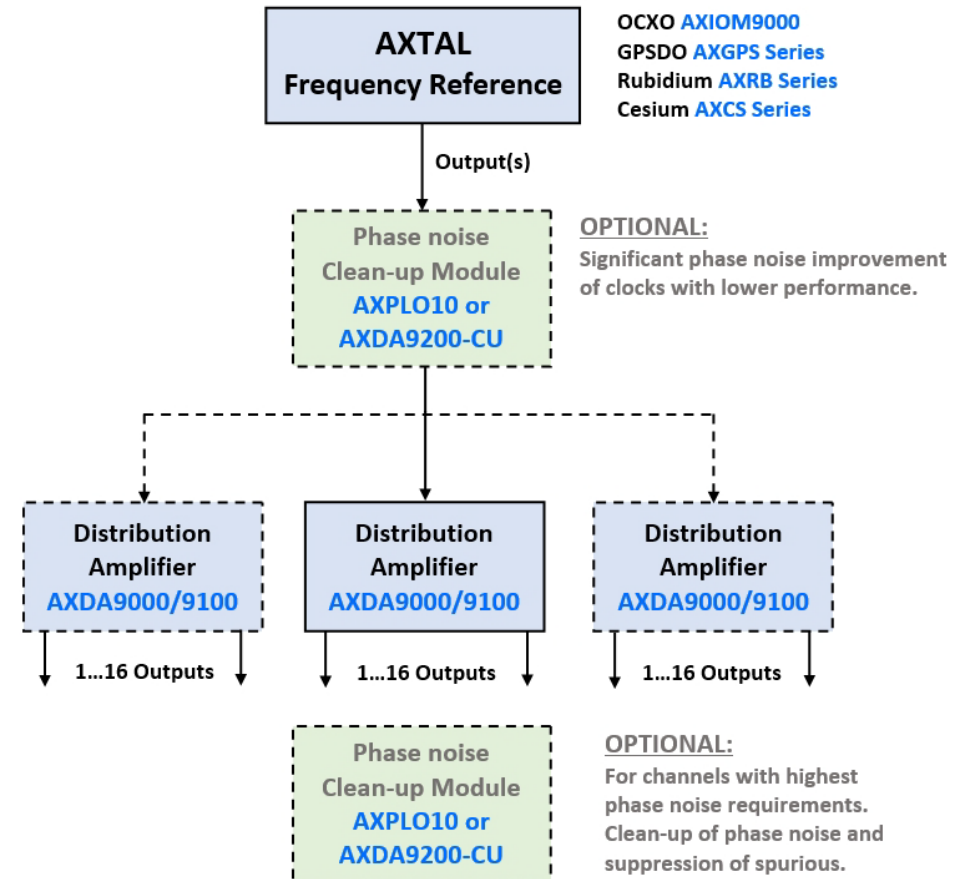

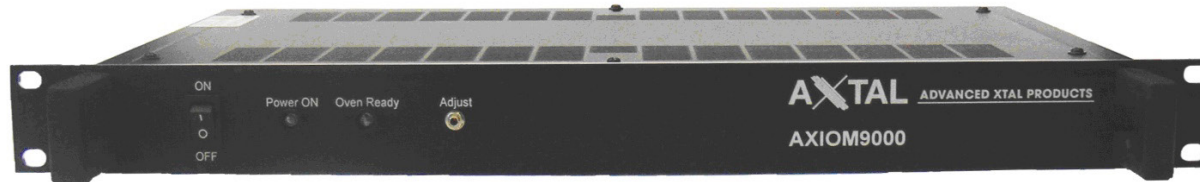


Model	AXIOM9000 Very High Stability Ultra-Low Noise Reference (D)OCXO				AXDO9000 AXIOM9000 Reference with integrated low-noise distribution amplifier				AXGPS9000 GPS-disciplined Ultra-Low Noise OCXO Frequency Reference				AXRB9000 Very High Stability Ultra-Low Noise Rubidium Frequency Reference			
Stability / Phase noise at 10 MHz [dBc/Hz]	2E-12	1 s	-110	1 Hz	2E-12	1 s	-110	1 Hz	8E-12	1 s	-110	1 Hz	1E-11	1 s	-100	1 Hz
	5E-12	10 s	-140	10 Hz	5E-12	10 s	-140	10 Hz	1E-11	10 s	-140	10 Hz	3E-12	10 s	-140	10 Hz
	8E-12	100 s	-157	100 Hz	8E-12	100 s	-150	100 Hz	1E-11	100 s	-160	100 Hz	1E-12	100 s	-155	100 Hz
	1E-11	1E3 s	-167	1 kHz	1E-11	1E3 s	-160	1 kHz	4E-12	1E3 s	-170	1 kHz	1E-12	1E3 s	-165	1 kHz
	5E-11	1E4 s	-170	10 kHz	5E-11	1E4 s	-165	10 kHz	1E-12	1E4 s	-173	10 kHz	1E-12	1E4 s	-170	10 kHz
	1E-10	1E5 s	-170	100 kHz	1E-10	1E5 s	-165	100 kHz	1E-13	1E5 s	-173	100 kHz	1E-12	1E5 s	-170	100 kHz
Features	- Very High Stability - Ultra-Low Phase Noise - Very Low Aging - Up to 3 isolated outputs for frequency distribution - Cascadable with AXDA9000 distribution amplifier				- Very High Stability - Ultra-Low Phase Noise - Very Low Aging 4 to 16 isolated outputs for frequency distribution				- GPS-disciplined Very High Long-term Stability - Ultra-Low Phase Noise 10 MHz & 1PPS Output - RS-232 Interface / NMEA-0183 - Cascadable with AXDA9000/9100 distribution amplifiers				- Very High Long-term Stability - Ultra-Low Phase Noise 1PPS & 10 MHz distribution amplifiers integrated - External 1PPS disciplining - RS-232 Interface for Monitoring - Cascadable with AXDA9000/9100 distribution amplifiers			
Operation	AC Supply 100 ~ 240 V (47 ~ 63 Hz) / Operating temperature range -10°C ~ +60°C															
Size	Slim 19” Rack - 1 HU															




9000 Series Performance

Phase Noise

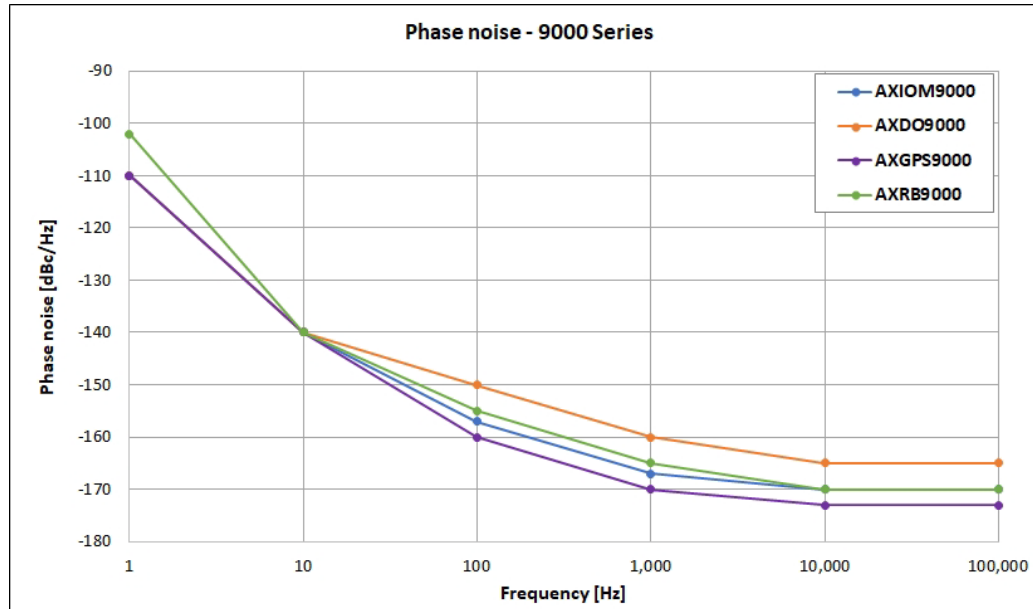

Stability (ADEV) & Holdover

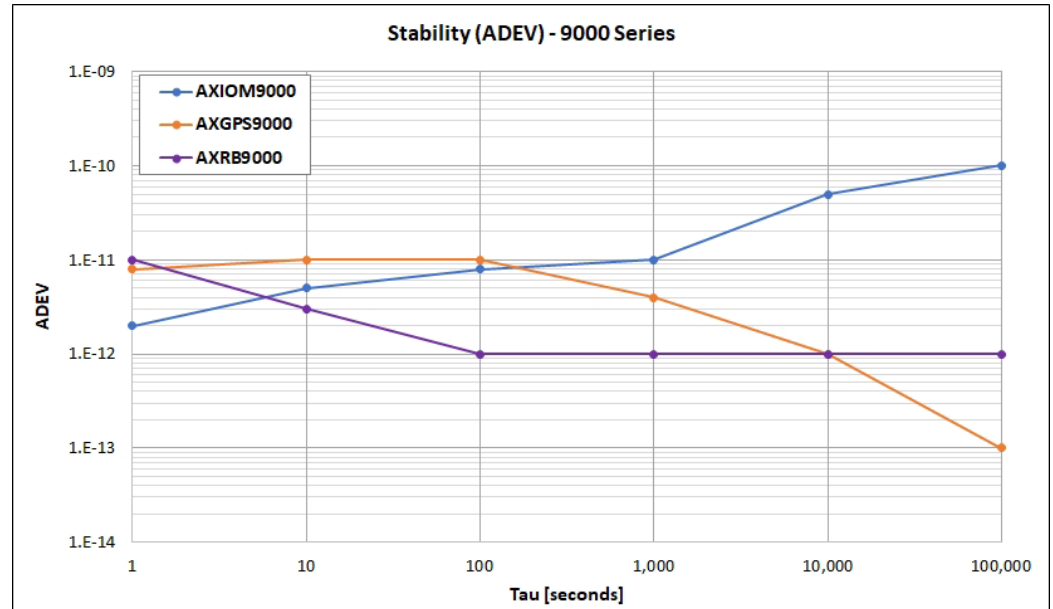

Time	AXIOM9000	AXGPS9000	AXRB9000
8 hours	1 μ s	100 ns	30 ns
24 hours	10 μ s	1 μ s	90 ns
3 days	100 μ s	10 μ s	260 ns
10 days	900 μ s	100 μ s	900 ns
1 month	8 ms	1 ms	2.6 μ s

Typical Holdover Performance

See also our
Distribution Amplifiers AXDA9000 Series for 1PPS and 10 MHz distribution
AXPLO10 & AXDA9200-CU for 10 MHz Phase Noise Clean-up



AXTAL GmbH
Roemerring 9, D-74821 Mosbach, Germany

www.axtal.com
fon: +49 (6261) 939 834

contact@axtal.com
fax: +49 (6261) 939 836


 Designed and
Manufactured
in Germany

Model					
	AXCPT1040	AXRB1031	AXRB1031H	AXRB1021	AXRB9000
Technology	CPT Atomic Clock	Rubidium			
Short-term stability	1E-10 1 sec 2E-11 10 sec 5E-12 100 sec	5E-11 1 sec 1E-11 10 sec 4E-12 100 sec	5E-11 1 sec 1E-11 10 sec 4E-12 100 sec	3E-11 1 sec 5E-12 10 sec 3E-12 100 sec	1E-11 1 sec 3E-12 10 sec 1E-12 100 sec
Long-term stability	1E-11 / day	5E-12 / day		1E-12 / day	< 1E-12 / day
Phase noise at 10 MHz [dBc/Hz]	-100 10 Hz -125 100 Hz -140 1 kHz	-100 10 Hz -130 100 Hz -135 1 kHz	-100 10 Hz -130 100 Hz -135 1 kHz	-110 10 Hz -140 100 Hz -150 1 kHz	-140 10 Hz -160 100 Hz -165 1 kHz
Features	- Smallest Miniature Atomic Clock - CPT Technology for high reliability - Low Power Consumption - Replacement for Microchip CSAC SA.45s	- Compact Miniature Rubidium - Sine wave - Low cost - Low power consumption - PCB mountable - Compatible with OCXO package	- AXRB1031 features 5 V Supply - HCMOS output - Replacement for Microchip SA.3Xm and SA5X	- High Stability - RS-232 Interface for Control & Monitoring - Replacement for obsolete Microchip X72 and SA.22c, but using standard connectors	- Very High Stability - Ultra-Low Noise 1PPS & 10 MHz distribution amps integrated - External 1PPS disciplining - RS-232 Interface for Control & Monitoring
Supply	3.3 V / 1.5 W	12~15 V / 6 W	5 V / 6 W	12~18 V / 8 W	AC 230 V / 30 W
Size	45 x 36 x 14.5 mm THD Package	51 x 51 x 25 mm THD Package	51 x 51 x 25 mm THD Package	89 x 76 x 28 mm Connectorized	19" Rack - 1 HU




Rubidium Performance

Phase noise

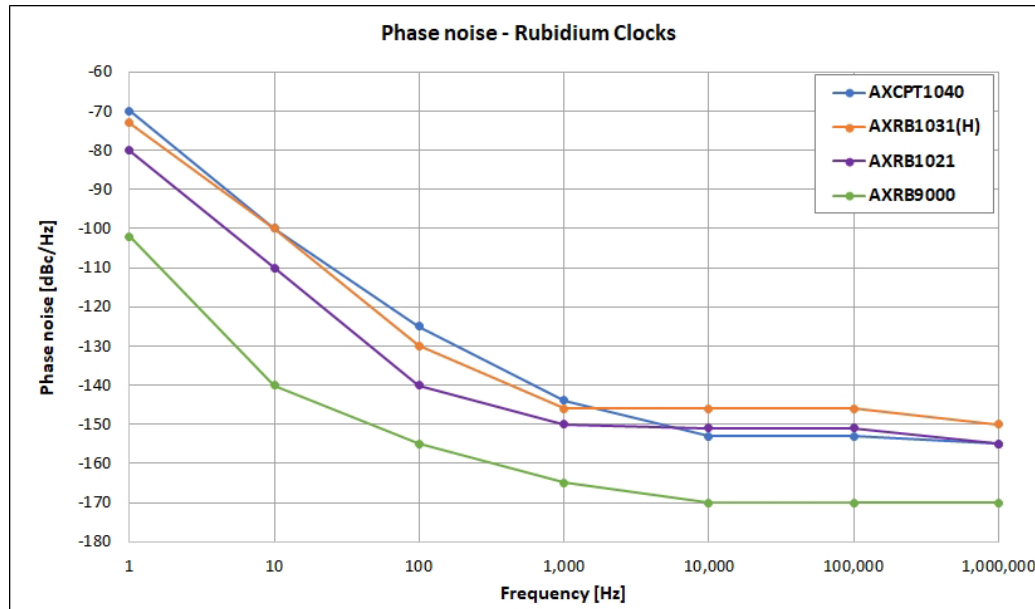

Stability (ADEV)

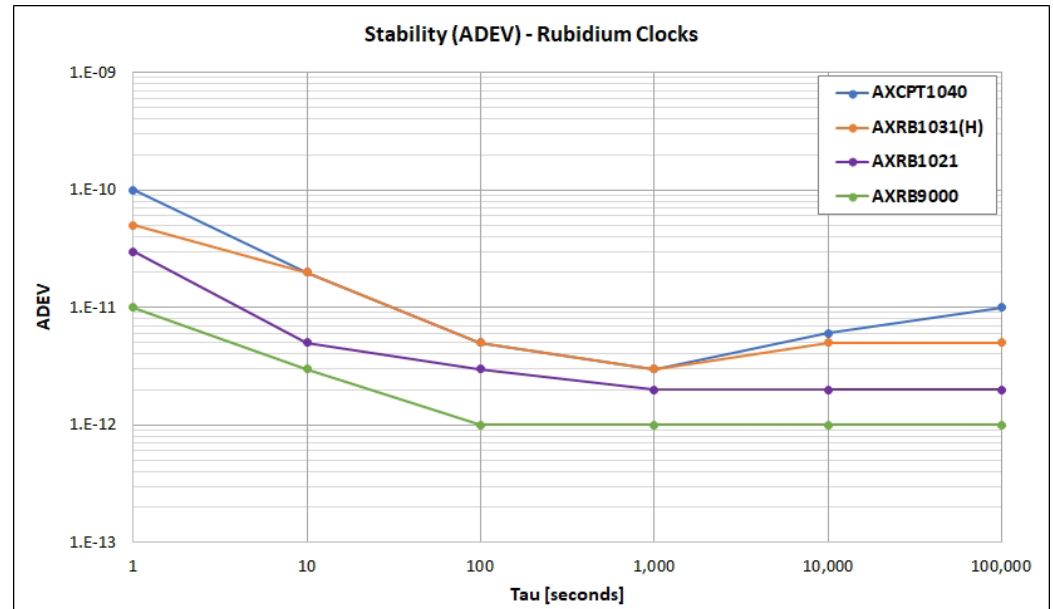


See also our
Distribution Amplifiers AXDA9000 Series for 1PPS and 10 MHz distribution
AXPLO10 & AXDA9200-CU for 10 MHz Phase Noise Clean-up




Model	 AXGPS5050				 AXGPS9000				 AXCS9000			
Technology	GPS-disciplined OCXO								Cesium Atomic Clock - Optically Pumped -			
Stability / Phase noise at 10 MHz [dBc/Hz]	1E-11 1E-11 1E-11 6E-12 1E-12 1E-13	1 s 10 s 100 s 1E3 s 1E4 s 1E5 s	-100 -130 -145 -150 -155 -155	1 Hz 10 Hz 100 Hz 1 kHz 10 kHz 100 kHz	1E-11 1E-11 1E-11 6E-12 1E-12 1E-13	1 s 10 s 100 s 1E3 s 1E4 s 1E5 s	-110 -140 -160 -165 -170 -170	1 Hz 10 Hz 100 Hz 1 kHz 10 kHz 100 kHz	3.0E-12 2.0E-12 8.0E-13 2.5E-13 8.0E-14 2.0E-14 1.0E-14	1 s 10 s 100 s 1E3 s 1E4 s 1E5 s Floor	-105 -135 -154 -158 -158 -158	1 Hz 10 Hz 100 Hz 1 kHz 10 kHz 100 kHz
Features	▪ Compact Miniature GPSDO ▪ Very High Stability ▪ Low Noise ▪ 10 MHz & 1PPS Output ▪ RS-232 Interface / NMEA-0183 ▪ PCB mountable				▪ Very High Stability ▪ Ultra-Low Noise ▪ 10 MHz & 1PPS Output ▪ RS-232 Interface / NMEA-0183 ▪ Available with integrated 10 MHz and 1PPS distribution amplifiers ▪ Cascadable with AXDA9000/9100 distribution amplifiers				▪ Primary Reference Clock (PRC) ▪ Optically pumped Cesium ▪ Long tube life time of 10 years ▪ 5 MHz, 10 MHz and 1PPS Outputs ▪ Standard & High Performance ▪ Cascadable with AXDA9000/9100 distribution amplifiers			
Supply	12 V / 3 W				AC 230 V / 10 W				DC 22~75 V AC 220 V / 120 W			
Size	50 x 50 x 25 mm THD Package				Slim 19" Rack - 1 HU				19" Rack - 4 HU			



Phase noise

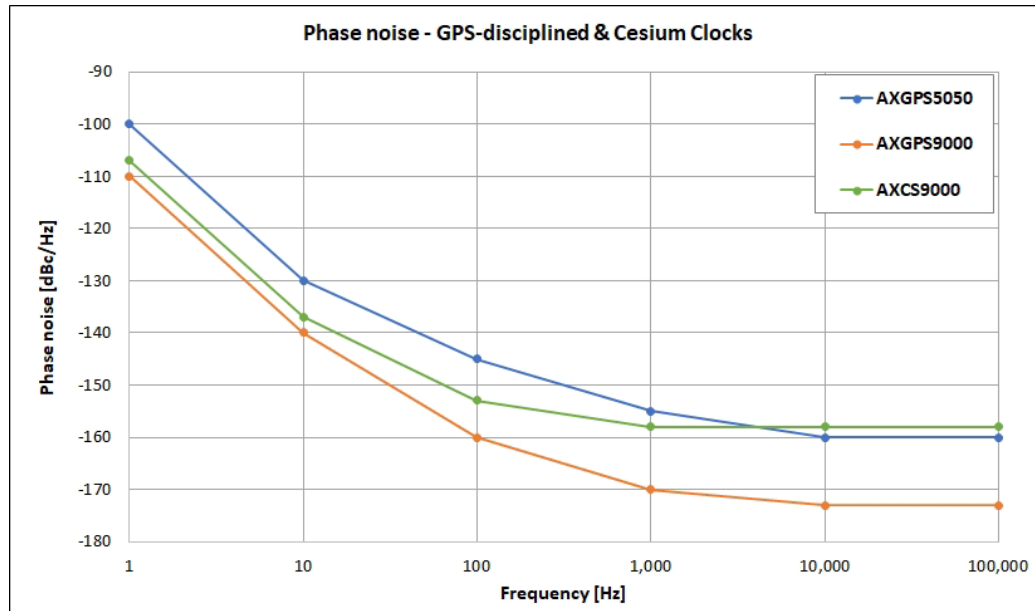

Stability (ADEV)

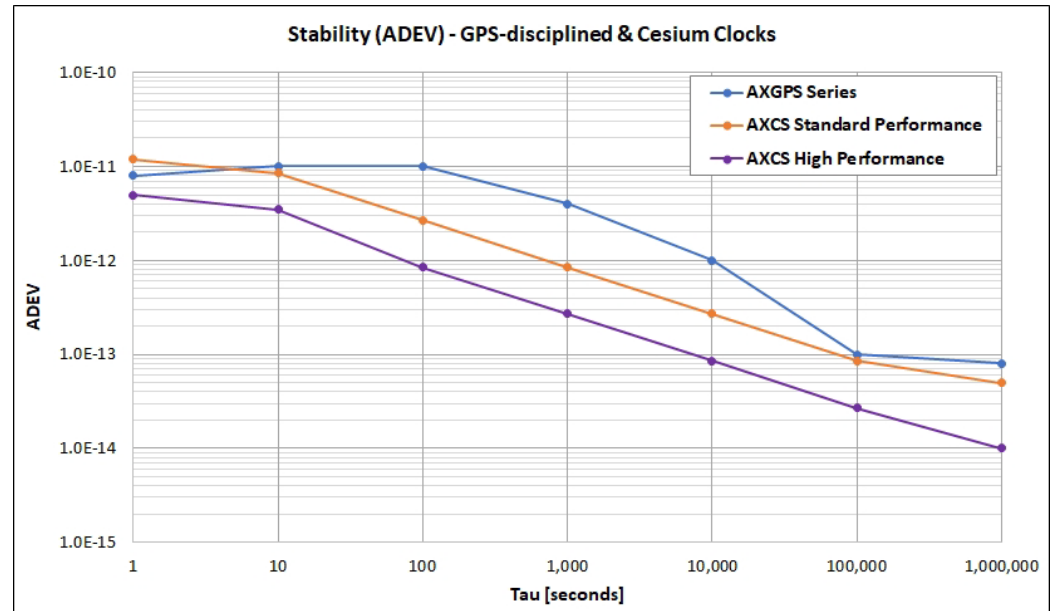

See also our
 Distribution Amplifiers AXDA9000 Series for 1PPS and 10 MHz distribution
 AXPLO10 & AXDA9200-CU for 10 MHz Phase Noise Clean-up






Customized Masterclocks for the most demanding Timing and Frequency Generation Systems

Expertise	AXTAL designs and manufactures fully-customized Masterclocks in accordance with your requirements. With our highest class of oscillators from Ultra-Low Noise OCXOs up to Atomic Clocks we offer supreme clock performance in a wide frequency range using state-of-the-art technology.
Applications	▪ Timing Systems for Particle Accelerators ▪ Ground Station Reference Systems for Space Applications ▪ Sophisticated Frequency Distribution Systems ▪ Frequency Conversion, Jitter Attenuation and Clock Translation ▪ Scientific Applications
Features	▪ Ultra-Low Phase Noise and Phase Jitter, Very High Frequency Stability ▪ Frequency Conversion and Synthesis up to 7 GHz ▪ Multiple Outputs for Synchronization & Frequency Distribution ▪ Monitor & Control Functions via RS-232, LAN or USB ▪ High Reliability (optional redundancy and watch-dog function)



Performance Examples

AXPLO9000-21

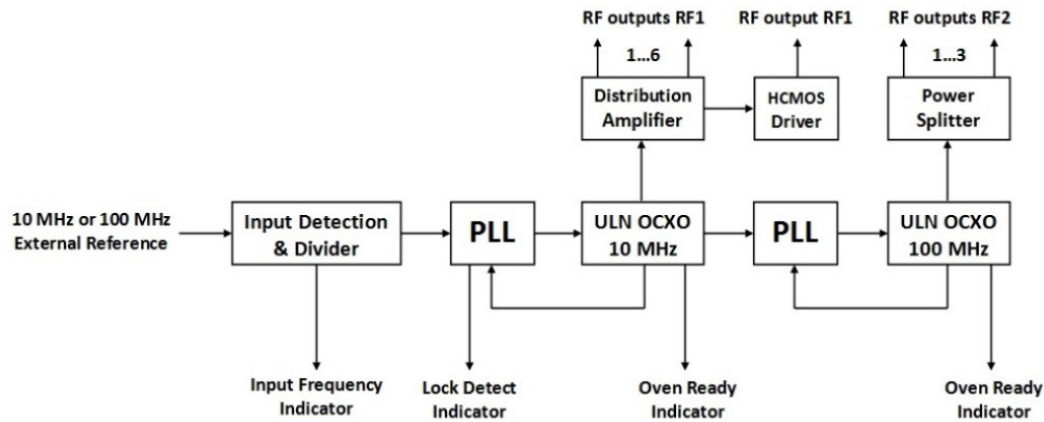


Masterclock with multiple Ultra-Low Noise Outputs at 10 MHz and 100 MHz

- All outputs are phase coherent
- Multiple outputs for 10 MHz and 100 MHz
- Very High Frequency Stability: 20 ppb/year (free-running)
- Ultra-Low Phase Noise (close-in and noise floor)
- Optional External Reference Input: 10 MHz or 100 MHz
- High Reliability for Safety Critical Application
- Phase noise performance:

10 MHz		100 MHz	
-112 dBc/Hz	1 Hz	-110 dBc/Hz	10 Hz
-142 dBc/Hz	10 Hz	-140 dBc/Hz	100 Hz
-157 dBc/Hz	100 Hz	-170 dBc/Hz	1 kHz
-167 dBc/Hz	1 kHz	-177 dBc/Hz	10 kHz
<-170 dBc/Hz	Floor	<-183 dBc/Hz	Floor

AXPLO9000-22

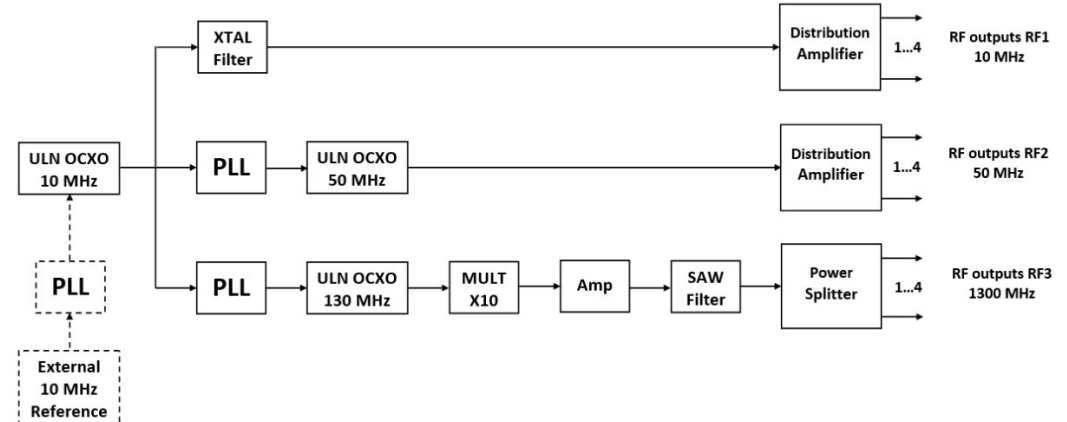

Masterclock with multiple Ultra-Low Jitter Outputs at 10, 50 and 1300 MHz

- All outputs are phase coherent (locked to 10 MHz)
- Multiple outputs for 10 MHz, 50 MHz and 1300 MHz
- Ultra-Low RMS Phase Jitter: **50 fs (1 Hz ~ 100 MHz)**
- Ultra-Low Phase Noise (close-in and noise floor)
- Optional External Reference Input: 10 MHz
- Monitor Interface
- Phase noise performance:

10 MHz		50 MHz		1300 MHz	
-118 dBc/Hz	1 Hz	-102 dBc/Hz	1 Hz	-75 dBc/Hz	1 Hz
-145 dBc/Hz	10 Hz	-115 dBc/Hz	10 Hz	-86 dBc/Hz	10 Hz
-160 dBc/Hz	100 Hz	-128 dBc/Hz	100 Hz	-105 dBc/Hz	100 Hz
-167 dBc/Hz	1 kHz	-163 dBc/Hz	1 kHz	-136 dBc/Hz	1 kHz
<-170 dBc/Hz	Floor	<-175 dBc/Hz	Floor	-150 dBc/Hz	10 kHz
				<-160 dBc/Hz	Floor





ADVANCED XTAL PRODUCTS

a  Q-TECH Company

CONTACT



ADVANCED XTAL PRODUCTS

a  Q-TECH Company

english  deutsch



Home

About AXTAL

Products

Quality

News

Support

Jobs

Contact

WELCOME TO THE EXPERT FOR FREQUENCY CONTROL AND PIEZO SENSORS

OUR PRODUCTS

CRYSTAL OSCILLATORS

- ✕ Packaged Xtal Oscillators / Clocks (SPXO)
- ✕ Voltage Controlled Xtal Oscillators (VCXO)
- ✕ Temp.-Compen. Xtal Oscillators (TCXO)
- ✕ Oven Controlled Xtal Oscillators (OCXO)
- ✕ SAW Oscillators (PSO, VCXO, OCSO)
- ✕ Vibration Insensitive Oscillators
- ✕ Oscillators for Aerospace & Defence
- ✕ Oscillators for Space Applications

OSCILLATOR MODULES

- ✕ Modules for Aerospace & Defence
- ✕ Phase-Locked Oscillator Modules
- ✕ GHz Crystal-Controlled Sources
- ✕ Gated Crystal Oscillators for IFF Masterclocks

FREQUENCY REFERENCE UNITS & DISTRIBUTION

- ✕ OCXO Frequency References
- ✕ Miniature Atomic Clock
- ✕ Rubidium Atomic Clocks
- ✕ Cesium Atomic Clocks
- ✕ GPS-disciplined Oscillators
- ✕ Distribution Amplifiers

MISCELLANEOUS PRODUCTS

- ✕ Precision Crystals (Crown)
- ✕ Quartz Crystal Units for Space Application
- ✕ Crystal Filters for Space Application
- ✕ Evaluation Boards
- ✕ Frequency Counter Modules

PRODUCT SEARCH

- ✕ Oscillator Search
- ✕ Other Products
- ✕ Catalog
- ✕ Legacy Products

Q-TECH PRODUCTS

- ✕ Q-Tech Corporation
- ✕ Q-Tech Product Overview
- ✕ Q-Tech Product Search



Q-TECH Corporation
High-Reliability Crystal Oscillators

For more details please consult our website www.axtal.com
or contact us directly as shown below

Notes:



AXTAL GmbH

Roemerring 9
D-74821 Mosbach, Germany

www.axtal.com
+49 (6261) 939 –

contact@axtal.com
fon: 834 fax: 836



Designed and
Manufactured
in Germany